


RR355-60-WH

Resin for General Purpose

- Strong & Durable
- Fast curing
- Cost effective
- Excellent surface finish

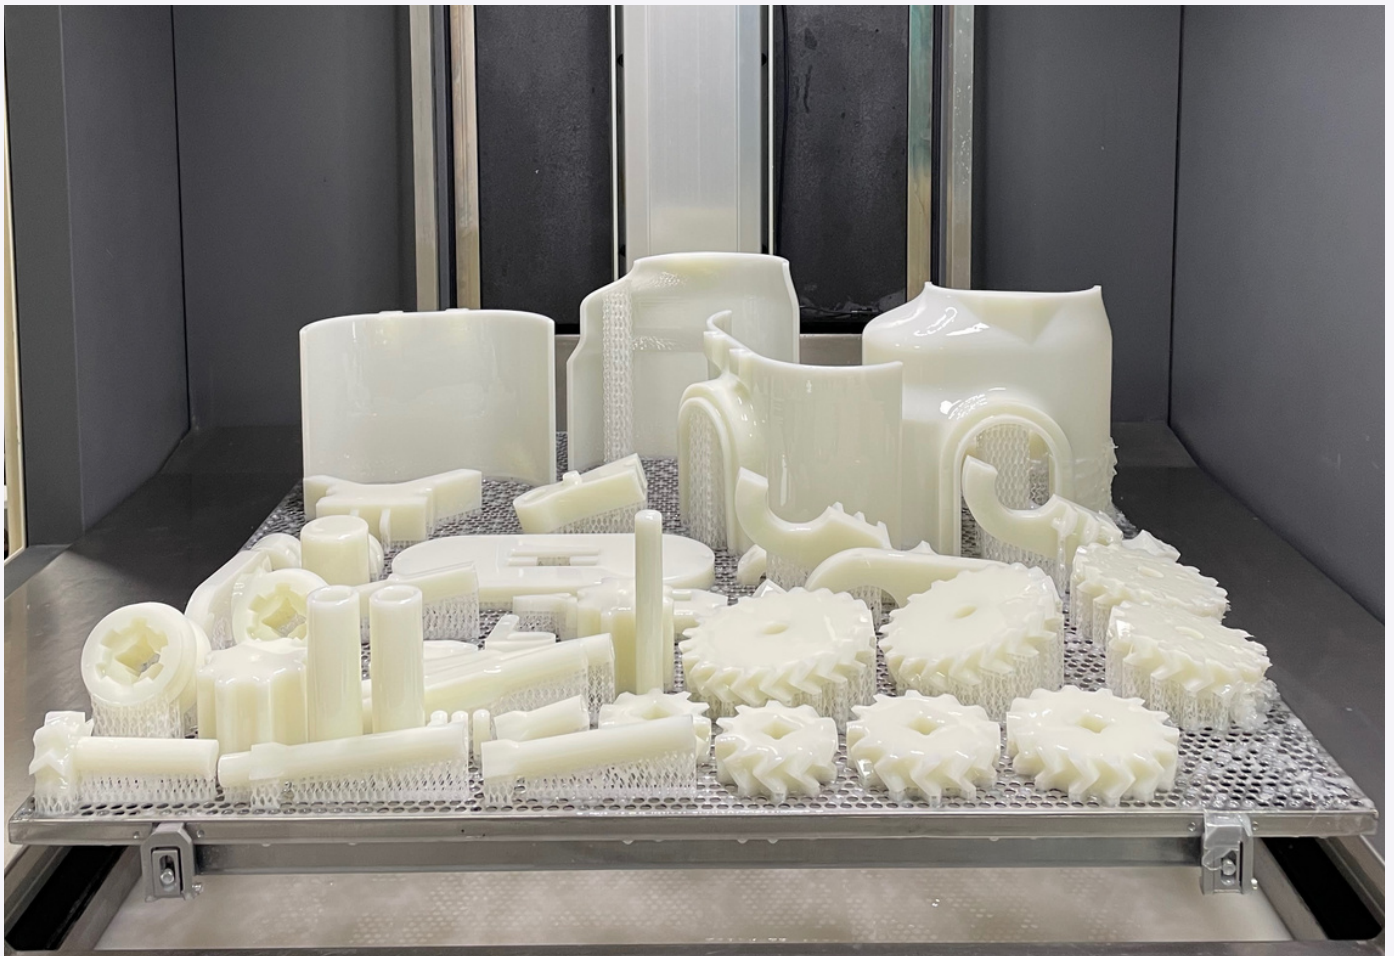

Ideal for general purpose and detail critical builds. Its low viscosity with excellent re-wetting provide fast build times increasing productivity.

Mechanical Properties

Tensile Strength	ASTM D638	54 Mpa
Tensile Modulus	ASTM D638	2920 Mpa
Elongation at break	ASTM D638	4-6%
Flexural Strength	ASTM D790	85 Mpa
Flexural Modulus	ASTM D790	2670 Mpa
Impact Strength	ASTM D256	18.6 J/m
Notched Izod	ASTM D256	0.35 ft-lb/in
Hardness	ASTM D2240	81 shore D
Water Absorbtion	ASTM D570-98	0.25%
Heat Deflection @ 66 psi	ASTM D648	54 deg C
Heat Deflection @ 264 psi	ASTM D648	50 deg C